The RBT-402 Thin Client

Faster, Smaller, Cooler

Overview

The RBT-402 delivers on the promise of increased performance and low cost in a compact package. Assembled in the USA, this unit weighs just over 1lb. allowing flexible mounting options and lower shipping costs.

The VIA Eden 400MHz processor provides users with exceptional performance and low power consumption. Available with internal 802.11 b/g wireless, the RBT-402 is one of the smallest thin clients on the market with this option.

The RBT-402 is available with a full array of features including FireFox browser, Thunderbird email client, Common Unix Printing System (CUPS) for enhanced printing capabilities, Remote Desktop Protocol (RDP) and Independent Computing Architecture (ICA).
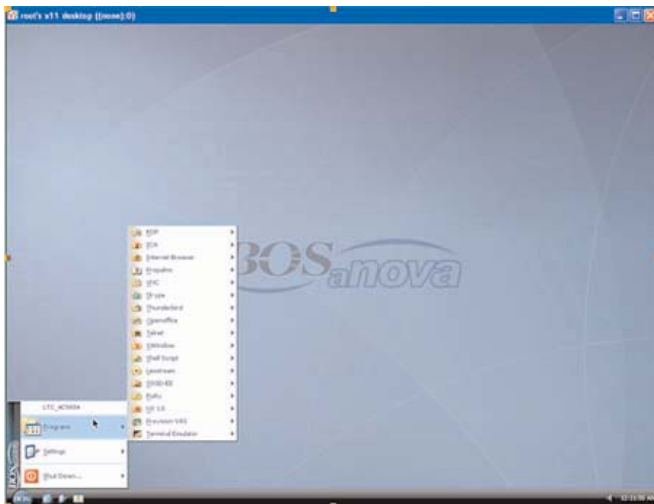
Versatile Operating Environment

The RBT-402 supports three modes of operation:

WBT Mode - Windows based Terminal mode, where the terminal behaves like a CE.NET device with full screen applications, GUI 5250/3270, Terminal Server access, Citrix or Propalms which auto start and auto-reconnect.

Desktop Mode - Windows Vista type user interface provides access to all applications in a windowing environment.

Kiosk Mode - dedicated Kiosk type of interface not configurable by the user of the terminal.

The RBT-402 offers the look and feel of Windows Vista and the versatility and speed of Linux.

:*Shown with Optional Internal Wireless

Benefits:

- Industry standard OS (Linux 2.6 Kernel)

- Small form factor for space-saving, desktop and mounted deployments

- Advanced emulation with 8 5250 sessions. Split Screen, Rule Cursor, macro support, multi host, GUI, SSL,122-key keyboard support

- Internal 802.11 b/g wireless option

- Includes RDP, ICA and Propalms clients

- Firefox browser and Thunderbird email client

- Integrated with CUPS for enhanced printing capabilities

- Support of Provision Networks, XenDesktop, VMWare, Ericom and Leostream VDI clients

- File explorer feature providing visualization and browsing of local drives

The RBT-402 Thin Client

Faster, Smaller, Cooler

Options

Part Number	5402
Standard Flash/Ram	256MB/256MB (Flash/Ram)
Standard Client Software	
ICA	Version 10
RDesktop	●
Host Access	Supports 8 TN5250e and TN3270e sessions,Telnet with SSH, SSL, Ericom, Wyse 60, Xterm R6, VT100, VT220 and VT400
Browser	Firefox
Propalms	●
Video Resolution	Up to 1920 x 1440

Software Configuration

Operating System	Linux 2.6 Kernel
Security Features	Read-only file system, locked-down user account, administrative passwords
Client Software	
Linux PN Agent	●
Secure Gateway	●
VNC Shadowing	●
BOSmanager	●
PDF Viewer	●
Thunderbird	●
NX Client	●
X-Windows	●
VDI Client	Provision Networks, Leostream, XenDesktop, VMWare, Ericom
Language Support	US, UK English, Spanish, Italian, German, French, and 30 more including Eastern Europe
Special Features	Autostart/auto-restart connection, multiple level lock-down user

Management

BOSmanager Support	●
Push/Pull Updates	●
VNC	●
Software/Configuration Cloning	●

Hardware Configuration

Form Factor	Compact stand-alone metal case
CPU	VIA Eden 400MHz
Audio	
Mic In/Line Out	●
Internal Speaker	●
Networking	Autosensing, 10/100 Ethernet, RJ-45, WakeOnLAN, PXE boot, Internal 802.11 b/g wireless
I/O and Expansion	
PS2 Port	●
USB Ports – Type 2.0	4
Physical Specifications	
Dimensions	1.4" W x 5.9" H x 4.7" D 35mm x 150 mm x 120 mm
Base Weight	1.4 lbs. (.66kg)
Environmental	
Operating Temperature	0° ~ 35°C 35° ~ 95°F
Operating Humidity	0% ~ 90%
Power Consumption	8 - 9 watts average
Power Requirements	12V DC 2A
Security	Kensington Security Lock Slot

Ordering Information

PID	Description
5402	RBT-402 Thin Client, Linux, 5250, RDP, ICA, AC/DC Adapter, Optical Mouse
9001	USB to Centronics Parallel
9006	VESA Mounting Bracket
9009	Internal Wireless
8009	OpenOffice Suite and Java Cache V1.1.3
8122b	122-key Driverless PC Keyboard
8104b	104-key PC Keyboard

IBM Business Partner

ASSEMBLED & SUPPORTED IN THE USA

www.bosanova.net

vmware

CITRIX

QUEST SOFTWARE
PROVISION NETWORKS DIVISION

LEOSTREAM

ERICOM
ACCESS DONE RIGHT

V1108