

The RBT-470 Thin Client

Faster, Smaller, Cooler

Overview


The RBT Series delivers on the promise of increased performance and low cost in a compact package. Assembled in the USA, the RBT Series weighs just over 11lb allowing you flexible mounting options and lower shipping costs. The robust and fan-less construction allows for quiet and reliable operation.

The high speed VIA 400 MHz processor provides users with exceptional performance and low power consumption within a small footprint.

Enterprise Class Remote Administration

The RBT-470 Thin Client is simple to configure either locally or remotely using the BOSmanager, which enables the following tasks:

- Complete terminal configuration from a central location
- User lock-out from configuration changes
- Scheduling of firmware updates
- Cloning of user environments
- Control over which applications run on a particular terminal

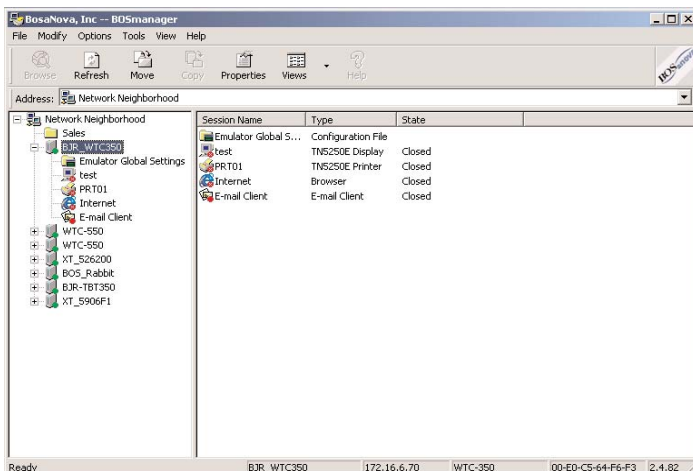

The RBT-470 Thin Client is simple to configure either locally or remotely using the BOSmanager.



Benefits:

- Industry standard OS (CE 5.0 Pro)
- Small form factor for space-saving, desktop and mounted deployments
- 802.11 b/g wireless ready
- Kensington security lock slot for enhanced security
- SNMP based management software included
- 3-year advance exchange warranty



The RBT-470 Thin Client

Faster, Smaller, Cooler

Options

Part Number	5470
Standard Flash/Ram	128MB/256MB (Flash/Ram)
Standard Client Software	
ICA	Version 9
RDP	5.5
Propalms	•
CrossRun	•
Screen Resolution	Up to 1920 x 1440

Software Configuration

Operating System	CE 5.0 Pro
Security Features	Read-only file system, locked-down user account, administrative passwords
Client Software	
Citrix ICA	•
Secure Gateway	•
VNC Shadowing	•
BOSmanager	•
ThinPrint	•
Language Support	US, UK English, Spanish, Italian, German, French, and 30 more including Eastern Europe
Special Features	Autostart/auto-restart connection, multiple level lock-down user interface

Management

BOSmanager Support	•
Push/Pull Updates	•
VNC	•
Software/Configuration Cloning	•

Hardware Configuration

Form Factor	Compact stand-alone metal case
CPU	VIA 400 MHz
Audio	
Mic In/Line Out	•
Internal Speaker	•
Networking	Autosensing, 10/100 Ethernet, RJ-45, WakeOnLAN, PXE boot, USB 802.11 b/g support
I/O and Expansion	
PS2 Port	1
USB Ports – Type 2	4
Physical Specifications	
Dimensions	1.4" W x 5.9" H x 4.7" D 35mm x 150 mm x 120 mm
Base Weight	1.4 lbs (0.66kg)
Environmental	
Operating Temperature	0° ~ 35°C 35° ~ 95°F
Operating Humidity	0% ~ 90%
Power Consumption	8 - 9 Watts
Power Requirements	12V DC 2A
Security	Kensington Security Lock Slot

Ordering Information

PID	Description
5470	RBT-470 Thin Client, CE 5.0 Pro, RDP, ICA, AC/DC Adapter, Optical Mouse
9001	USB to Centronics Parallel
9003	VESA Mounting Bracket
9005	USB 802.11 B/G wireless adapter
8104b	104-key PC Keyboard
8122b	122-key Driverless PC Keyboard



BOSaNOVA, Inc. Phone: 866-865-5250 Email: sales@bosanova.net Web: www.bosanova.net

BOSaNOVA LTD (Europe) Phone: +44 1509 276252 Email: sales@bosanova.co.uk